

Heat Transfer Fluid HP-15 20 Litre 62545

- Ready-to-use heat transfer fluid suitable for use in Air and Ground Source Heat Pumps
- Provides frost protection to -15°C
- Protects against corrosion and limescale
- High performance, non-toxic formulation
- Compatible with all materials commonly found in Heat Pump systems
- pH stable product



A non-toxic, ready-to-use, inhibited heat transfer fluid for Air and Ground Source Heat Pumps. This product is designed to protect against corrosion and limescale, as well as frost protection to -15°C.

Application

Fernox HP-15 is ready to use. Do not dilute. Fernox HP-15 provides frost protection to -15°C. Existing heating systems should be cleaned of sludge and limescale deposits with a suitable Fernox Cleaner before adding Fernox HP-15.

Specification

Composition: An aqueous solution of monopropylene glycol with specifically formulated inhibitors and stabilisers.

Odour: Characteristic

Form: Liquid

Appearance: Red liquid

S.G.: 1.03

pH: 7.4

Boiling point: 101-105 deg C

Water content: 65-70%

Package, Handling & Safety

Fernox HP-15 is supplied in 20 litre drums.

Keep out of reach of children. Do not mix with other chemicals. For further information, please consult the Safety Data Sheet (SDS).

Single Item

Height mm	365
Width mm	280
Depth mm	250
Weight kg	22.000
Barcode EAN	5014551625457


Outer Carton

Outer Height mm	365
Outer Width mm	280
Outer Depth mm	250
Outer Weight kg	22.000
Transit Type	Euro 1200 x 800
Total units per transit layer	12
Layers per transit type	2
Total units per transit type	24


Safety Data Sheet (EN)

[62545-GB-GB.pdf](#)


Specific Heat Temperature

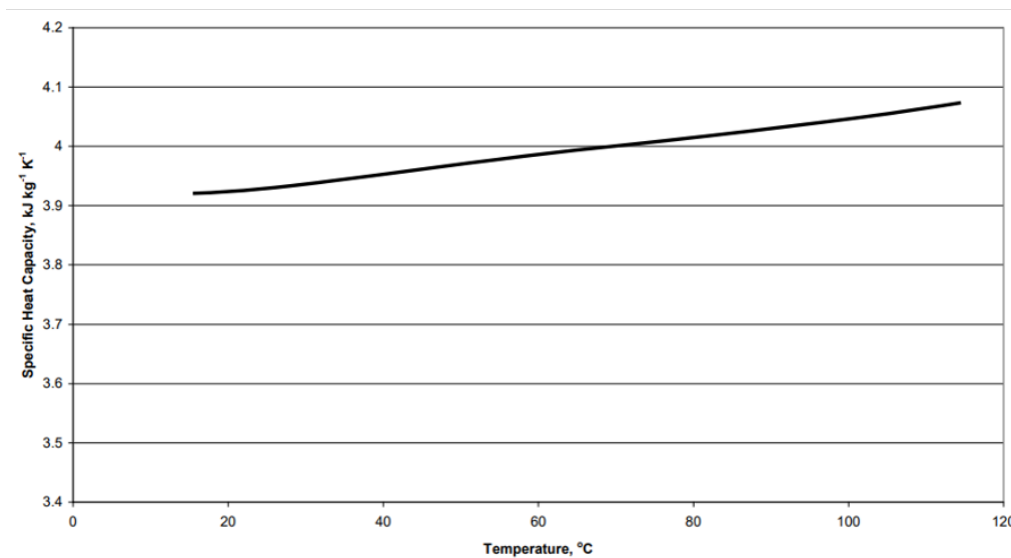

Viscosity Temperature

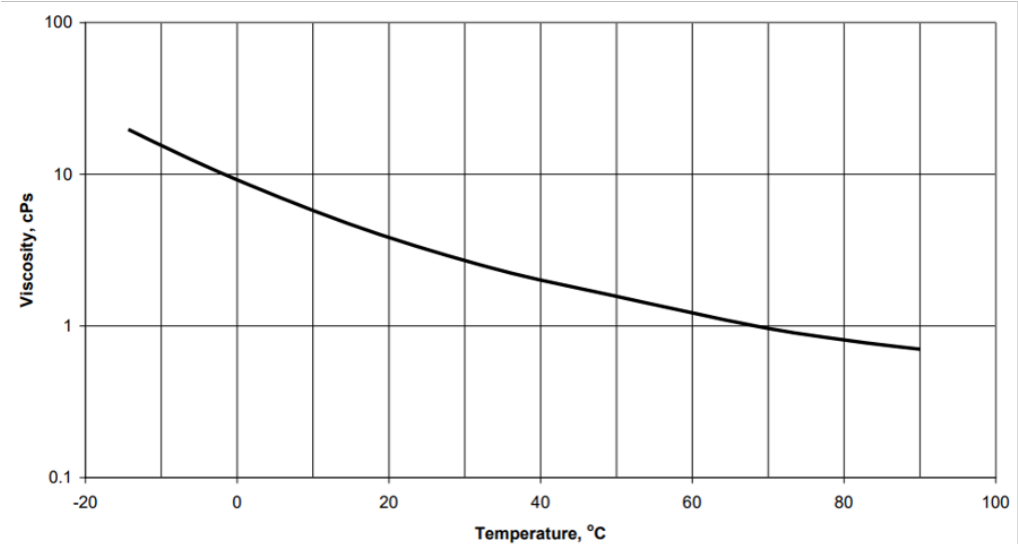

Frost Protection

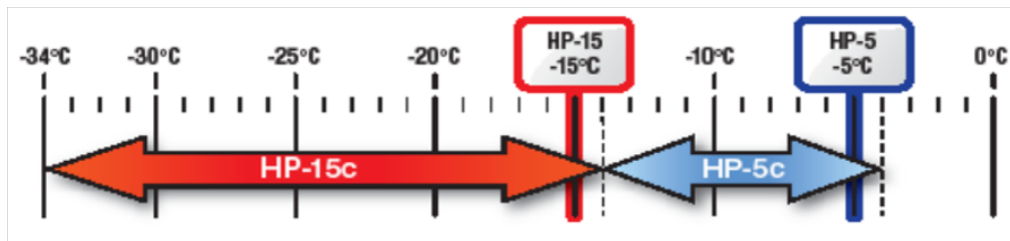

Last modification

06-12-2022 (d/m/y)